


# OIS-L Disc Tags

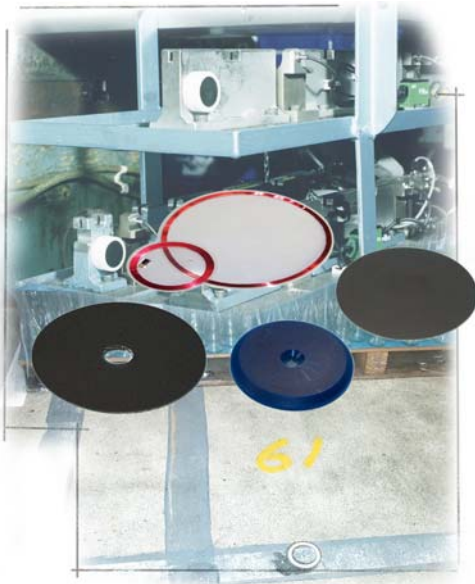

The RFID System OIS-L was developed especially for tough industrial applications. With shock-resistance and protection up to IP67, availability is ensured even when mounted directly onto trucks and forklifts. The system is well proven with number-rich clients, as well as under extremely harsh environmental conditions.

OIS-L is used in industrial production lines and in the corresponding supply logistics. The data tag can be attached to the workpiece, the workpiece carrier or the charge carrier. Another main area of use is logistic processes, especially the control of the outgoing goods in block warehouses.

Stockpile identification with RFID has helped many clients to achieve 100% transparency and control over storage. This, along with substantially improved vehicle organization, with the help of the OIS-L RFID System contributes to greater savings.

The antennas are passive; in particular any OIS-L antenna is only the inductive part of the systems resonance circuit. In general antennas have to be used in an air environment. Special antennas for mounting directly onto metal are available.

- Passive transponder
- Automatic adjustment
- Flexible application adjustment
- Temperature-proof transponder
- Large write and read ranges
- Serial and Profibus versions
- Customized antennas possible

## Readers

The readers provide the antenna with the power required for the data transfer and the analog signals. The standard reader operates 2 antennas. On the other side the readers create the connection to the process. If desired, the direct connection to the process takes place through digital inputs and outputs. Standard serial as well as Profibus host interfaces are available off-the-shelf.

## Antennas

IDEN TEC SOLUTIONS' long-standing experience becomes apparent in the availability of antennas for very diverse application areas. Antennas are available for mounting directly onto metal or outside. An excellent system property is the possibility of fine-tuning the antenna even after it has been integrated in the facility.

## Data tags

The OIS-L system works with data tags of the IC types Hitag 1 and Hitag 2 by Philips as well as read-only types, e.g. EM 4102 by EMM. Furthermore heat-resistant data tags are a special feature of this system.

**IDENDEC SOLUTIONS**

IDENDEC SOLUTIONS is the global leader in active wireless tracking solutions. A commitment to developing ground-breaking, industry-specific tracking solutions featuring proprietary patented technology has placed IDENDEC SOLUTIONS in the international forefront as a technology provider for innovation and as a complete solution provider in the automotive, oil, gas and mining industries.

Utilized by the world's leading organizations and system integrators, IDENDEC SOLUTIONS' award-winning technology portfolio offers robust, highly effective tracking solutions that manage critical process and optimize supply chain flow. Privately held since 1999, IDENDEC SOLUTIONS has provided asset management solutions and support to a variety of organizations, including an impressive roster of Fortune 500 clients such as Volkswagen, Audi, Deutsche Post and General Electric. Headquartered in Lustenau, Austria, the company's North American headquarters are located in Dallas, Texas, with customer service centers in Hong Kong, Germany, Australia and Norway. For more information, please visit: [www.identecolutions.com](http://www.identecolutions.com).


Information in this document is subject to change without notice and becomes contractual only after written confirmation by IDENDEC SOLUTIONS.

"IDENDEC SOLUTIONS", "Intelligent Long Range", "ILR", "I-LINKS", "I-Q", "I-D", "I-B", "I-CARD", "I-PORT", "Solutions. It's in our name.", "Smarten up your assets." and the stylized "i" are trademarks or registered trademarks of IDENDEC SOLUTIONS, Inc. and/or IDENDEC SOLUTIONS AG.

Copyright © 2008 by IDENDEC SOLUTIONS. All rights reserved.

**Technical Data**

**Mechanical Data**

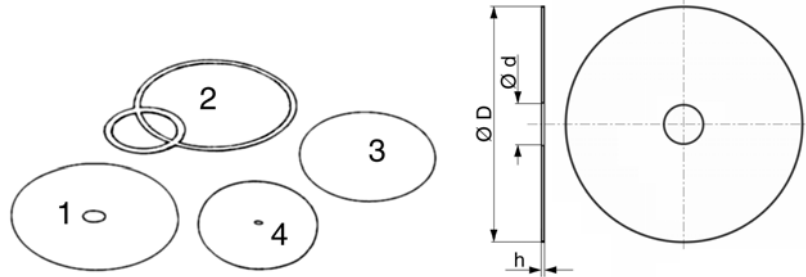

Note: All dimensions in mm

The following tag types are available as standard.

| Designation   | Type      | Img | D   | d   | H   | Material | Order code |
|---------------|-----------|-----|-----|-----|-----|----------|------------|
| DT.00.100.07  | Read-only | 3   | 100 | 5,5 | 1,6 | Epoxy    | 100 483    |
| DT.00.100.08* | Read-only | 3   | 100 | 60  | 1,5 | Epoxy    | 100 490    |
| DT.01.100.07  | HiTag1    | 1   | 100 | 5,5 | 1,5 | Epoxy    | 100 481    |
| DT.02.100.08* | HiTag2    | 1   | 100 | 60  | 1,6 | Epoxy    | 100 485    |

\* "Floor Tag" for stockplace ID

The following tag types are only available on request.

| Designation  | Type      | Img | D  | d   | H   | Material | Order code |
|--------------|-----------|-----|----|-----|-----|----------|------------|
| DT.00.030.01 | Read-only | 1   | 30 | 3,2 | 1,0 | Epoxy    | 100 286    |
| DT.00.030.06 | Read-only | 4   | 36 | 5   | 4   | PUR      | 100 491    |
| DT.00.050.01 | Read-only | 3   | 50 | 4,3 | 1   | Epoxy    | 100 277    |
| DT.01.030.01 | HiTag1    | 1   | 30 | 3,2 | 1,0 | Epoxy    | 100 326    |
| DT.01.050.01 | HiTag1    | 1   | 50 | 4,3 | 1,0 | Epoxy    | 100 325    |
| DT.02.030.01 | HiTag2    | 1   | 30 | 3,2 | 1,0 | Epoxy    | 100 323    |
| DT.02.050.01 | HiTag2    | 1   | 50 | 4,3 | 1,0 | Epoxy    | 100 319    |

**Environmental Conditions**

| Material | Temperature Range | Protection class |
|----------|-------------------|------------------|
| Epoxy    | -25 °C ... +85 °C | IP66             |
| PUR      | -30 °C ... +75 °C | IP67             |