

# OIS-L Antenna AN.77.SR.13



The RFID System OIS-L was developed especially for tough industrial applications. With shock-resistance and protection up to IP67, availability is ensured even when mounted directly onto trucks and forklifts. The system is well proven with number-rich clients, as well as under extremely harsh environmental conditions.

OIS-L is used in industrial production lines and in the corresponding supply logistics. The data tag can be attached to the workpiece, the workpiece carrier or the charge carrier. Another main area of use is logistic processes, especially the control of the outgoing goods in block warehouses.

Stockpile identification with RFID has helped many clients to achieve 100% transparency and control over storage. This, along with substantially improved vehicle organization, with the help of the OIS-L RFID System contributes to greater savings.

The antennas are passive; in particular any OIS-L antenna is only the inductive part of the systems resonance circuit. In general antennas have to be used in an air environment. Special antennas for mounting directly onto metal are available.

- Passive transponder
- Automatic adjustment
- Flexible application adjustment
- Temperature-proof transponder
- Large write and read ranges
- Serial and Profibus versions
- Customized antennas possible

## Readers

The readers provide the antenna with the power required for the data transfer and the analog signals. The standard reader operates 2 antennas. On the other side the readers create the connection to the process. If desired, the direct connection to the process takes place through digital inputs and outputs. Standard serial as well as Profibus host interfaces are available off-the-shelf.

## Antennas

IDEN TEC SOLUTIONS' long-standing experience becomes apparent in the availability of antennas for very diverse application areas. Antennas are available for mounting directly onto metal or outside. An excellent system property is the possibility of fine-tuning the antenna even after it has been integrated in the facility.

## Data tags

The OIS-L system works with data tags of the IC types Hitag 1 and Hitag 2 by Philips as well as read-only types, e.g. EM 4102 by EMM. Furthermore heat-resistant data tags are a special feature of this system.

## IDENDEC SOLUTIONS

IDENDEC SOLUTIONS is the global leader in active wireless tracking solutions. A commitment to developing ground-breaking, industry-specific tracking solutions featuring proprietary patented technology has placed IDENDEC SOLUTIONS in the international forefront as a technology provider for innovation and as a complete solution provider in the automotive, oil, gas and mining industries.

Utilized by the world's leading organizations and system integrators, IDENDEC SOLUTIONS' award-winning technology portfolio offers robust, highly effective tracking solutions that manage critical process and optimize supply chain flow. Privately held since 1999, IDENDEC SOLUTIONS has provided asset management solutions and support to a variety of organizations, including an impressive roster of Fortune 500 clients such as Volkswagen, Audi, Deutsche Post and General Electric. Headquartered in Lustenau, Austria, the company's North American headquarters are located in Dallas, Texas, with customer service centers in Hong Kong, Germany, Australia and Norway. For more information, please visit: [www.identecsolutions.com](http://www.identecsolutions.com).

Information in this document is subject to change without notice and becomes contractual only after written confirmation by IDENDEC SOLUTIONS.

"IDENDEC SOLUTIONS", "Intelligent Long Range", "ILR", "i-LINKS", "i-Q", "i-D", "i-B", "i-CARD", "i-PORT", "Solutions. It's in our name.", "Smarten up your assets." and the stylized "i" are trademarks or registered trademarks of IDENDEC SOLUTIONS, Inc. and/or IDENDEC SOLUTIONS AG.

Copyright © 2008 by IDENDEC SOLUTIONS. All rights reserved.


## Technical Data

### Operating Data

Operating frequency	125 kHz
Tuning	Free air
Cable	5 m fixed mounted, PUR, min. bending radius: 50 mm, static use, specify cable inlet on order (straight or right angle)
Type designation	AN.77.SR.13.02
Order code	100 514

### Mechanical Data

Housing	Brass/PBTP
Weight	260 g incl. cable
Dimensions	M18 × 1, 20 mm long
Mounting proposal	2 screws M3

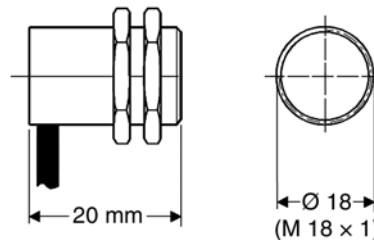

### Environmental Conditions

Temperature range	0 to +50 °C (Operating) -10 to +60 °C (Storage)
Protection class	IP67

[www.identecsolutions.com](http://www.identecsolutions.com)

IDENDEC SOLUTIONS AG  
Millennium Park 2  
6890 Lustenau  
Austria  
Tel. +43 5577 87387 0  
Fax +49 5577 87387 15  
info@identecsolutions.at

IDENDEC SOLUTIONS  
Deutschland GmbH  
Hertzstrasse 10  
69469 Weinheim  
Germany  
Tel.: +49 (0)6201 9957-0  
Fax: +49 (0)6201 9957-99

IDENDEC SOLUTIONS, Inc.  
Liberty Plaza II, Suite 375  
5057 Keller Springs Rd,  
Addison, Texas 75001  
USA  
Tel: (972) 535 4144  
Fax: (469) 424-0404

IDENDEC SOLUTIONS  
Asia Limited  
12/F, Unit 1202, ING Tower  
308-320, Des Voeux Road C.  
Hong Kong  
Tel. (852) 28051816  
Fax (852) 28051814

IDENDEC SOLUTIONS AS  
Skarpengland  
4715 ØVREBØ  
Norway  
Tel. +47 38 13 91 53  
Fax +47 38 13 96 91

IDENDEC SOLUTIONS  
Australia Pty Ltd  
Suite 4/125  
Terralong Street, Kiama  
NSW 2529  
Australia  
Tel.: +61 2 4232 4999  
Fax: +61 2 4232 4888